


Thermocouple "K" surface probe, CP500

code: CP500

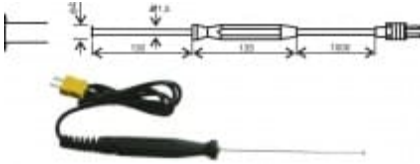

Fast response surface probe for flat surface type CP500 -65 to 500°C
With with subminiature male connector.

Thermocouple tolerance: class 1 according to IEC584-2 $\pm 1.5^{\circ}\text{C}$ or
 $\pm 0.004 \times t$ (which is higher)

Technical data